


CV..M (CV..M)
Flange Type With Vertical Mount.

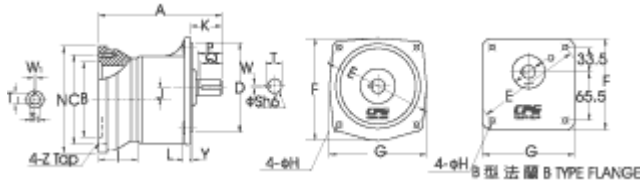

INPUT BORE			
KW	BORE	KEYWAY	
	S1 F7	W1	T1
1/4 HP	φ11	4	12.8
1/2 HP	φ14	5	16.3
1 HP	φ19	6	21.8
2 HP	φ24	8	27.3
3 HP	φ28	8	31.3
5 HP	φ28	8	31.3

OUTPUT SHAFT					
SHAFT	KEYWAY			KEY	
	P	W	T	Q	SPEC'
Sh6					
φ18	30	5	20.2	27	5*5*27
φ22	40	7	25	35	7*7*35
φ28	45	7	31.1	40	7*7*40
φ32	55	10	35.5	50	10*8*50
φ40	65	10	43.5	60	10*8*60
φ50	80	14	54	75	14*9*75

UNIT(mm)

KW	RATIO	SIZE	A	B	C	D	E	F	G	H	I	J	K	L	N	Y	Z
200W 1/4HP	3-10	*18	160	110	130	50	140	120	120	9	55	16	38	12	160	6	M8
	15-90	22	195	110	130	148	185	175	165	11	55	17.7	48	12	160	3	M8
	100-170	28	225	110	130	170	220	205	195	11	55	23.1	58	13	160	3	M8
400W 1/2HP	3-10	22	195	110	130	148	185	175	165	11	55	17.7	48	12	160	3	M8
	15-90	28	225	110	130	170	220	205	195	11	55	23.1	58	13	160	3	M8
	100-200	32	255	110	130	185	255	248	225	13	55	30.2	65	16	160	3	M8
750W 1HP	3-25	28	250	130	165	170	220	205	195	11	82	23.1	58	13	200	3	M10
	30-120	32	285	130	165	185	255	248	225	13	82	30.2	65	16	200	3	M10
	125-200	40	325	130	165	230	310	290	268	15	82	36	85	21	200	5	M10
1500W 2HP	3-30	32	285	130	165	185	255	248	225	13	82	30.2	65	16	200	3	M10
	40-100	40	340	130	165	230	310	290	268	15	82	36	85	21	200	5	M10
	105-120	50	405	130	165	280	390	360	335	18	82	51	92	25	200	5	M10
2200W 3HP	3-40	40	350	180	215	230	310	290	268	15	95	36	85	21	250	5	M14
	45-100	50	415	180	215	280	390	360	335	18	95	51	92	25	250	5	M14
3700W 5HP	3-10	40	350	180	215	230	310	290	268	15	95	36	85	21	250	5	M14
	15-60	50	415	180	215	280	390	360	334	18	95	51	92	25	250	5	M14

NOTE 1. Available For IEC Metric Motor.

2. * Belong To "B" Type Output Flange.



บริษัท เอฟ เอ็น เอ็นจิเนียริ่ง จำกัด
F.N.ENGINEERING CO.,LTD.

Tel: 0-2918-4441-2,0-2918-3378 [Auto] Hotline 08-1174-3345

Fax: 0-2918-3070,0-2918-2722

Email : sale@fnengineering.com , fnengineer@gmail.com