




CHEN YING

CESH Type Resistance Electric Lubricator

◆Taiwan Patent No. M269392



CESH-01 Standard

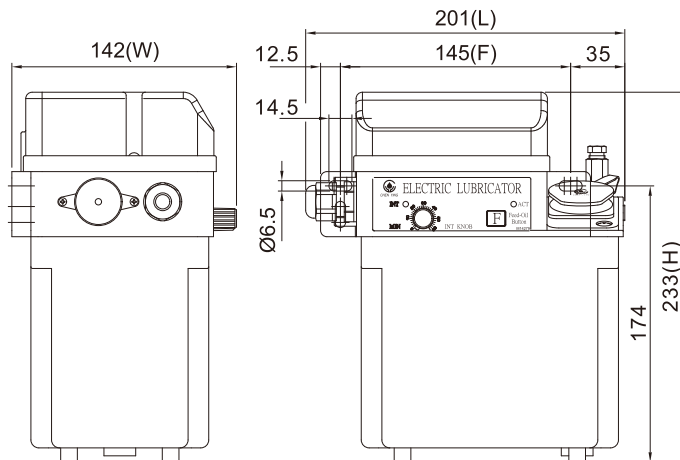

CESH-01 Standard Externals

◆Features

- 1.The standard of CESH type, operation time is 10 sec fixed, and interval time is 1-60 min or 1-180 min optional.
- 2.The electronic box has operation indicator and interval indicator. Two types of this CESH series, CESH Turn On-Feeding Type and CESH Turn On-Interval Type, both could automatically save the original operation and interval time setting. If the power is suddenly off, after turning on the power, both would start the cycle again.
- 3.It has a float switch that can detect the oil volume. When the oil is lower than the standard, the float switch will send continuous signal automatically and the buzzer will alarm.
- 4.Please don't press the force feed-oil (**[F]** button) more than three minutes in order to avoid overloading.
When the temperature reaches 100℃ ,the sensor will be on to stop the motor continue running about 5 minutes.

◆Application of Machines Equipment

- 1.CESH Turn On-Feeding Type is suitable for the machinery that needs automatically oil feeding after turning on the power.
- 2.CESH Turn On-Interval Type is suitable for the machinery that has to avoid feeding oil immediately after turning on the power.

Model	Act Time	Interval Time	Motor Output Watt	Max Volume	Max Pressure	1Ø Voltage	Ampere	Hertz	Discharge Bore	Pressure Gauge	Oil Viscosity
CESH	10 sec (Non-adjustable)	1-180 min or 1- 60 min Optional	20±3W	130 cc/min	10kgf/cm ²	110V 220V	1.5A 1.0A	60Hz or 50Hz	Ø4orØ6	Optional	32-68cSt@40℃

Model	Tank Code	Tank Material	Capacity Liters	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
CESH	01	Resin	2L	145	201	142	233	2.30
	02	Aluminum	2L	95 x 200	225	151	224	3.50
	03	Resin	3L	205	230	167	239	2.80
	04	Resin	4L	250	277	162	257	3.45
	05	Aluminum	4L	95 x 280	297	170	252	4.45
	08	Iron	8L	95 x 338	355	200	264	7.20

CESH Single Phase Wiring Diagram

Abnormal Output			Ground	Power
NO(A)	NC(B)	COM	GND(P.E)	POWER
⊕	⊕	⊕	⊕	⊕ ⊕

◆Order Code :

CESH	01	2	C	1	2	※
Tank Capacity(Material)		Time (Act x Interval)		Voltage		Special Request
01 : 2L (Resin)		1 : 10 sec x 60 min		A : 110V,60Hz		0 : Ø4
02 : 2L (Aluminum)		2 : 10 sec x 180 min		B : 220V,50Hz		1 : Ø6
03 : 3L (Resin)				C : 220V,60Hz		2 : Ø4 (With Pressure Gauge)
04 : 4L (Resin)						3 : Ø6 (With Pressure Gauge)
05 : 4L (Aluminum)						
08 : 8L (Iron)						