


CHD

Double Shaft Type With Horizontal Mount.

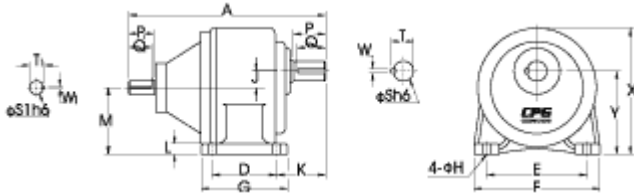

INPUT SHAFT						
SHAFT		KEYWAY			KEY	
KW	S1 h6	P1	W1	T1	Q1	SPEC'
0.1/0.2	14	25	5	16.2	22	5*5*22
0.4	16	30	5	18.2	27	5*5*27
0.75	19	40	6	21.7	35	6*6*35
1.5	24	50	8	27.1	45	8*7*45
2.2	28	55	8	31.1	50	8*7*50
3.7	28	55	8	31.1	50	8*7*50

OUTPUT SHAFT					
SHAFT		KEYWAY		KEY	
Sh6	P	W	T	Q	SPEC'
φ18	30	5	20.2	27	5*5*27
φ22	40	7	25	35	7*7*35
φ28	45	7	31.1	40	7*7*40
φ32	55	10	35.5	50	10*8*50
φ40	65	10	43.5	60	10*8*60
φ50	80	14	54	75	14*9*75

UNIT(mm)

KW	RATIO	SIZE	A	D	E	F	G	H	J	K	L	M	X	Y
100W 1/8HP	3-50	18	170	40	110	135	65	9	16	50	10.5	72.5	138	88.5
	60-160	22	200	65	130	158	90	11	17.7	60	13	80	152	97.5
200W 1/4HP	3-10	18	170	40	110	135	65	9	16	50	10.5	72.5	138	88.5
	15-90	22	200	65	130	158	90	11	17.7	60	13	80	152	97.5
	100-170	28	270	90	140	178	120	11	23.1	70.5	17	93	178	116
400W 1/2HP	3-10	22	230	65	130	158	90	11	17.7	60	13	80	152	97.5
	15-90	28	270	90	140	178	120	11	23.1	70.5	17	93	178	116
	100-200	32	315	130	170	215	165	13	30.2	70	21	108.5	216	138.5
750W 1HP	3-25	28	280	90	140	178	120	11	23.1	70.5	17	93	178	116
	30-120	32	315	130	170	215	165	13	30.2	70	21	108.5	216	138.5
	125-200	40	375	150	210	265	205	15	36	83	23	124	250	160
1500W 2HP	3-30	32	325	130	170	215	165	13	30.2	70	21	108.5	216	138.5
	40-100	40	375	150	210	265	205	15	36	83	23	124	250	160
	105-120	50	458	170	265	335	230	18	51	121	30	149	306	200
2200W 3HP	3-40	40	398	150	210	265	205	15	36	83	23	124	250	160
	45-100	50	463	170	265	335	230	18	51	121	30	149	306	200
3700W 5HP	3-10	40	398	150	210	265	205	15	36	83	23	124	250	160
	15-60	50	463	170	265	335	230	18	51	121	30	149	306	200



บริษัท เอฟ เอ็น เอ็นจิเนียริง จำกัด
F.N.ENGINEERING CO.,LTD.

Tel: 0-2918-4441-2,0-2918-3378 [Auto] Hotline 08-1174-3345

Fax: 0-2918-3070,0-2918-2722

Email : sale@fnengineering.com , fnengineer@gmail.com